

**TODD
SYSTEMS****1:1 LINE ISOLATION TRANSFORMERS**

FULLY RATED FOR CONTINUOUS USE

DESIGNED AND MADE IN THE USA

OVER 40 YEARS AS THE INDUSTRY LEADER

- U.L. LISTED COMPONENTS
- FULLY RATED AT 50 OR 60 Hz

- CLEARLY MARKED ELECTRICAL RATINGS
- BLUE BAKED ENAMEL FINISH


AMERICAN STYLE
GROUNDING PLUG

115 V INPUT → 115 V OUTPUT

25 → 2000 VA ISOLATION
ELECTROSTATIC SHIELD CONNECTED TO CORE

CATALOG NUMBER	MAX.VA (WATTS)	NOMINAL AMPS	HIPOT TEST VOLTS	WEIGHT LBS.	DIMENSIONS				
					H	W	D	MW	MD
LI-25 G	25	0.22	1500	1 5/8	3 1/8	2 5/8	2 1/2	2	1 1/2
LI-50 G	50	0.44	1500	3	3 1/2	2 7/8	3	2 1/4	1 7/8
LI-100 G	100	0.87	1500	4	3 1/2	2 7/8	3 1/2	2 1/4	2 1/4
LI-175 G	175	1.52	1500	7	4 5/8	3 7/8	3 7/8	3	2 3/4
LI-250 G	250	2.17	1500	10	4 5/8	3 7/8	4 3/8	3	3 1/4
LI-350 G	350	3.04	1500	14	4 5/8	3 7/8	5 1/4	3	4 1/8
LI-500 G	500	4.35	1500	17 1/2	6	4 3/8	5 1/8	3 7/16	3 3/8
LI-750 G	750	6.52	1500	24	6	4 3/8	6 3/8	3 7/16	4 1/2
LI-1000 G	1000	8.70	1500	30	6	4 3/8	7 1/4	3 7/16	5 1/2
LI-1500 G	1500	13.04	1500	42	6 1/2	5 1/2	7 1/2	4 1/4	5 3/8
LI-2000 G	2000	17.39	1500	58	6 1/2	5 1/2	9	4 1/4	6 7/8

IN STOCK

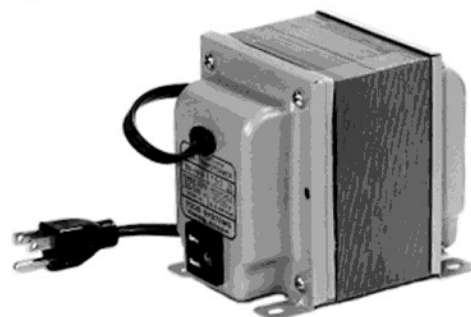

- 6 FOOT 3 WIRE U.S. GROUNDING POWER CORD
- BUILT-IN U.S. 3 WIRE GROUNDING RECEPTACLE

Provides isolation of power line from ground and is effective in removing hash and line noise for sensitive equipment, e.g. lab instruments, audio equipment, etc.

LEAD WIRES FOR
PERMANENT WIRING

115 V INPUT → 115 V OUTPUT

25 → 2000 VA ISOLATION
ELECTROSTATIC SHIELD CONNECTED TO CORE

CATALOG NUMBER	MAX.VA (WATTS)	NOMINAL AMPS	HIPOT TEST VOLTS	WEIGHT LBS.	DIMENSIONS				
					H	W	D	MW	MD
LI-25 L	25	0.22	1500	1 5/8	3 1/8	2 5/8	2 1/2	2	1 1/2
LI-50 L	50	0.44	1500	3	3 1/2	2 7/8	3	2 1/4	1 7/8
LI-100 L	100	0.87	1500	4	3 1/2	2 7/8	3 1/2	2 1/4	2 1/4
LI-175 L	175	1.52	1500	7	4 5/8	3 7/8	3 7/8	3	2 3/4
LI-250 L	250	2.17	1500	10	4 5/8	3 7/8	4 3/8	3	3 1/4
LI-350 L	350	3.04	1500	14	4 5/8	3 7/8	5 1/4	3	4 1/8
LI-500 L	500	4.35	1500	17 1/2	6	4 3/8	5 1/8	3 7/16	3 3/8
LI-750 L	750	6.52	1500	24	6	4 3/8	6 3/8	3 7/16	4 1/2
LI-1000 L	1000	8.70	1500	30	6	4 3/8	7 1/4	3 7/16	5 1/2
LI-1500 L	1500	13.04	1500	42	6 1/2	5 1/2	7 1/2	4 1/4	5 3/8
LI-2000 L	2000	17.39	1500	58	6 1/2	5 1/2	9	4 1/4	6 7/8

IN STOCK



- FOUR 12 INCH LEAD WIRES USED FOR PERMANENT WIRING

Provides isolation of power line from ground and is effective in removing hash and line noise for sensitive equipment, e.g. lab instruments, audio equipment, etc.

NOTE: WHEN USING A TRANSFORMER WITH MORE THAN ONE APPLIANCE AT A TIME, THE TOTAL WATTAGE OF ALL APPLIANCES USED TOGETHER SHOULD NOT EXCEED THE MAX.VA (WATTS) OF THAT TRANSFORMER.

QUALITY ENGINEERED

TODD SYSTEMS

INC.

PRECISION BUILT

FAX: (914) 963-3506

50 ASH STREET, YONKERS, NY, 10701 U.S.A.
www.toddsystems.com

(914) 963-3400