



# 2:1 LINE ISOLATION TRANSFORMERS

FULLY RATED FOR CONTINUOUS USE

DESIGNED AND MADE IN THE USA

OVER 40 YEARS AS THE INDUSTRY LEADER

- U.L. LISTED COMPONENTS
- FULLY RATED AT 50 OR 60 Hz

- CLEARLY MARKED ELECTRICAL RATINGS
- BLUE BAKED ENAMEL FINISH


AMERICAN STYLE 220V  
GROUNDING PLUG

230 V INPUT → 115 V OUTPUT

50 → 2000 VA ISOLATION  
ELECTROSTATIC SHIELD CONNECTED TO CORE

CATALOG NUMBER	MAX.VA (WATTS)	NOMINAL AMPS	HIPOT TEST VOLTS	WEIGHT LBS.	DIMENSIONS				
					H	W	D	MW	MD
LI-50-1 G	50	0.44	2000	3.3	3 1/2	2 7/8	4	2 1/4	2 7/8
LI-100-1 G	100	0.87	2000	4	3 1/2	2 7/8	4 1/4	2 1/4	3 1/8
LI-250-1 G	250	2.17	2000	10	4 5/8	3 7/8	4 3/4	3	3 3/4
LI-350-1 G	350	3.04	2000	13	4 5/8	3 7/8	5 1/2	3	4 1/2
LI-500-1 G	500	4.35	2000	17 1/2	6	4 3/8	5 1/2	3 7/16	3 7/8
LI-750-1 G	750	6.52	2000	23 1/2	6	4 3/8	6 3/8	3 7/16	4 1/2
LI-1000-1 G	1000	8.70	2000	30	6	4 3/8	7 1/2	3 7/16	5 7/8
LI-1500-1 G	1500	13.04	2000	42	6 1/2	5 1/2	8 1/4	4 1/4	6 3/4
LI-2000-1 G	2000	17.39	2000	53	6 1/2	5 1/2	9 1/2	4 1/4	8

IN STOCK



Provides isolation of power line from ground and is effective in removing hash and line noise for sensitive equipment, e.g. lab instruments, audio equipment, etc.

- 6 FOOT 3 WIRE POWER CORD WITH GROUNDING U.S. TANDEM 220V PLUG
- BUILT-IN U.S. 3 WIRE GROUNDING RECEPTACLE


EUROPEAN STYLE  
GROUNDING PLUG

230 V INPUT → 115 V OUTPUT

50 → 2000 VA ISOLATION  
ELECTROSTATIC SHIELD CONNECTED TO CORE

CATALOG NUMBER	MAX.VA (WATTS)	NOMINAL AMPS	HIPOT TEST VOLTS	WEIGHT LBS.	DIMENSIONS				
					H	W	D	MW	MD
LI-50-1 SC	50	0.44	2000	3.3	3 1/2	2 7/8	4	2 1/4	2 7/8
LI-100-1 SC	100	0.87	2000	4	3 1/2	2 7/8	4 1/4	2 1/4	3 1/8
LI-250-1 SC	250	2.17	2000	10	4 5/8	3 7/8	4 3/4	3	3 3/4
LI-350-1 SC	350	3.04	2000	13	4 5/8	3 7/8	5 1/2	3	4 1/2
LI-500-1 SC	500	4.35	2000	17 1/2	6	4 3/8	5 1/2	3 7/16	3 7/8
LI-750-1 SC	750	6.52	2000	23 1/2	6	4 3/8	6 3/8	3 7/16	4 1/2
LI-1000-1 SC	1000	8.70	2000	30	6	4 3/8	7 1/2	3 7/16	5 7/8
LI-1500-1 SC	1500	13.04	2000	42	6 1/2	5 1/2	8 1/4	4 1/4	6 3/4
LI-2000-1 SC	2000	17.39	2000	53	6 1/2	5 1/2	9 1/2	4 1/4	8

IN STOCK

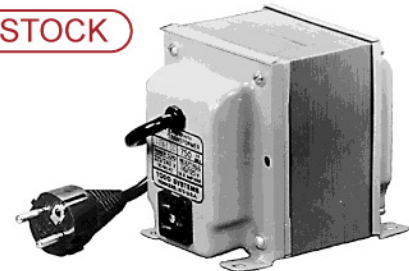

Provides isolation of power line from ground and is effective in removing hash and line noise for sensitive equipment, e.g. lab instruments, audio equipment, etc.

- 6 FOOT 3 WIRE GROUNDING POWER CORD WITH EUROPEAN "SCHUKO" PLUG
- BUILT-IN U.S. 3 WIRE GROUNDING RECEPTACLE

LEAD WIRES FOR  
PERMANENT WIRING

230 V INPUT → 115 V OUTPUT

50 → 2000 VA ISOLATION  
ELECTROSTATIC SHIELD CONNECTED TO CORE

CATALOG NUMBER	MAX.VA (WATTS)	NOMINAL AMPS	HIPOT TEST VOLTS	WEIGHT LBS.	DIMENSIONS				
					H	W	D	MW	MD
LI-50-1 L	50	0.44	2000	3.3	3 1/2	2 7/8	3 1/4	2 1/4	2
LI-100-1 L	100	0.87	2000	4	3 1/2	2 7/8	3 1/2	2 1/4	2 1/2
LI-250-1 L	250	2.17	2000	10	4 5/8	3 7/8	4 1/4	3	3 1/4
LI-350-1 L	350	3.04	2000	13	4 5/8	3 7/8	5	3	4
LI-500-1 L	500	4.35	2000	17 1/2	6	4 3/8	5	3 7/16	3 1/4
LI-750-1 L	750	6.52	2000	23	6	4 3/8	6 1/8	3 7/16	5 5/8
LI-1000-1 L	1000	8.70	2000	30	6	4 3/8	7	3 7/16	5 1/4
LI-1500-1 L	1500	13.04	2000	42	6 1/2	5 1/2	7 1/4	4 1/4	5 3/4
LI-2000-1 L	2000	17.39	2000	53	6 1/2	5 1/2	8 1/2	4 1/4	7

IN STOCK



Provides isolation of power line from ground and is effective in removing hash and line noise for sensitive equipment, e.g. lab instruments, audio equipment, etc.

- FOUR 12 INCH LEAD WIRES USED FOR PERMANENT WIRING

NOTE: WHEN USING A TRANSFORMER WITH MORE THAN ONE APPLIANCE AT A TIME, THE TOTAL WATTAGE OF ALL APPLIANCES USED TOGETHER SHOULD NOT EXCEED THE MAX.VA (WATTS) OF THAT TRANSFORMER.

QUALITY ENGINEERED

**TODD SYSTEMS**

INC.

PRECISION BUILT

FAX: (914) 963-3506

50 ASH STREET, YONKERS, NY, 10701 U.S.A.

www.toddsystems.com

(914) 963-3400