



HIGH POWER LINE ISOLATION TRANSFORMERS

FULLY RATED FOR CONTINUOUS USE

DESIGNED AND MADE IN THE USA

OVER 40 YEARS AS THE INDUSTRY LEADER

- U.L. LISTED COMPONENTS
- FULLY RATED AT 50 OR 60 Hz

- CLEARLY MARKED ELECTRICAL RATINGS
- BLUE BAKED ENAMEL FINISH


BRACKET MOUNTED
W/ TERMINAL BOARD

115 / 230 V INPUT → 115 V OUTPUT

2500 → 6000 VA ISOLATION
ELECTROSTATIC SHIELD CONNECTED TO CORE

CATALOG NUMBER	MAX.VA (WATTS)	NOMINAL AMPS	HIPOT TEST VOLTS	WEIGHT LBS.	DIMENSIONS				
					H	W	D	MW	MD
LI-2500-4	2500	21.74	2000	60	6 1/8	7 1/8	8 3/4	5 7/8	7
LI-3000-4	3000	26.09	2000	95	7 1/2	9	7 7/8	7 1/2	6 1/2
LI-4000-4	4000	34.78	2000	113	7 1/2	9	9	7 1/2	7 5/8
LI-5000-4	5000	43.48	2000	135	7 1/2	9	10 1/4	7 1/2	8 7/8
LI-6000-4	6000	52.17	2000	168	7 1/2	9	11 3/4	7 1/2	10 1/4

IN STOCK

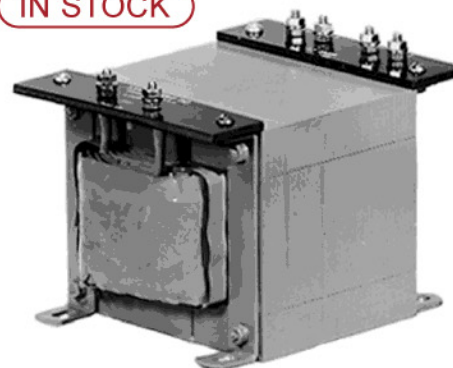

Provides isolation of power line from ground and is effective in removing hash and line noise for sensitive equipment, e.g. lab instruments, audio equipment, etc.

- SCREW TERMINALS FOR CONVENIENT WIRING
- OPEN FRAME BRACKET MOUNTED CONSTRUCTION
- INPUT VOLTAGE OF EITHER 115 OR 230 VOLTS
- WIRING INSTRUCTIONS CLEARLY MARKED ON TERMINAL BOARDS


BRACKET MOUNTED
W/ TERMINAL BOARD

230 / 460 V INPUT → 115 V OUTPUT

2500 → 6000 VA ISOLATION
ELECTROSTATIC SHIELD CONNECTED TO CORE

CATALOG NUMBER	MAX.VA (WATTS)	NOMINAL AMPS	HIPOT TEST VOLTS	WEIGHT LBS.	DIMENSIONS				
					H	W	D	MW	MD
LI-2500-5	2500	21.74	2500	60	6 1/8	7 1/8	8 3/4	5 7/8	7
LI-3000-5	3000	26.09	2500	95	7 1/2	9	7 7/8	7 1/2	6 1/2
LI-4000-5	4000	34.78	2500	113	7 1/2	9	9	7 1/2	7 5/8
LI-5000-5	5000	43.48	2500	135	7 1/2	9	10 1/4	7 1/2	8 7/8
LI-6000-5	6000	52.17	2500	168	7 1/2	9	11 3/4	7 1/2	10 1/4

IN STOCK

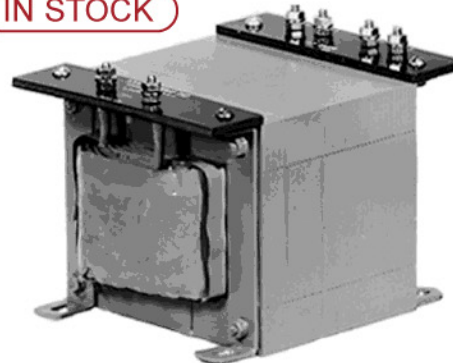

Provides isolation of power line from ground and is effective in removing hash and line noise for sensitive equipment, e.g. lab instruments, audio equipment, etc.

- SCREW TERMINALS FOR CONVENIENT WIRING
- OPEN FRAME BRACKET MOUNTED CONSTRUCTION
- INPUT VOLTAGE OF EITHER 230 OR 460 VOLTS
- WIRING INSTRUCTIONS CLEARLY MARKED ON TERMINAL BOARDS

NOTE: WHEN USING A TRANSFORMER WITH MORE THAN ONE APPLIANCE AT A TIME, THE TOTAL WATTAGE OF ALL APPLIANCES USED TOGETHER SHOULD NOT EXCEED THE MAX.VA (WATTS) OF THAT TRANSFORMER.

QUALITY ENGINEERED

TODD SYSTEMS

INC.

PRECISION BUILT

FAX: (914) 963-3506

50 ASH STREET, YONKERS, NY, 10701 U.S.A.
www.toddsystems.com

(914) 963-3400