



# MULTI-TAPPED VOLTAGE REGULATORS

DESIGNED AND MADE IN THE USA

OVER 40 YEARS AS THE INDUSTRY LEADER

- ALL COMPONENTS U.L. LISTED
- FULLY RATED AT 50 OR 60 Hz

- CLEARLY MARKED ELECTRICAL RATINGS
- BLUE BAKED ENAMEL FINISH

## MULTI-TAPPED VOLTAGE REGULATORS INPUT RANGE OF 84V - 138V WITH 8 SWITCH POSITIONS

### CONTROL OUTPUT WITH METER AND SWITCH

CATALOG NUMBER	MAX.VA (WATTS)	OUTPUT VOLTAGE	WEIGHT LBS.	DIMENSIONS		
				H	W	D
MVR 17/11	150	115	4.7	4 5/8	3 7/8	4 7/8
MVR 18/11	350	115	6.5	4 5/8	3 7/8	5 1/4
MVR 11/11	500	115	8.2	4 5/8	3 7/8	5 7/8
MVR 19/11	750	115	10	4 5/8	3 7/8	6 3/8
MVR 13/11	1000	115	13.7	4 5/8	3 7/8	7
MVR 14/11	1500	115	15.5	6	4 3/8	6 3/4
MVR 20/11	2000	115	20.5	6	4 3/8	7 3/8
MVR 17/12	150	230	5.9	4 5/8	3 7/8	5 1/2
MVR 18/12	350	230	7.9	4 5/8	3 7/8	5 3/4
MVR 11/12	500	230	11.2	4 5/8	3 7/8	6 5/8
MVR 19/12	750	230	15.5	4 5/8	3 7/8	7 1/4
MVR 13/12	1000	230	19	6	4 3/8	7 1/4
MVR 14/12	1500	230	25	6	4 3/8	8 3/8
MVR 20/12	2000	230	33.5	6	4 3/8	9 3/4

- 6 FOOT 3 WIRE U.S. GROUNDING POWER CORD
- BUILT-IN U.S. 3 WIRE GROUNDING RECEPTACLE
- SWITCH CONTROLS INPUT VOLTAGE SELECTION
- METER DISPLAYS OUTPUT VOLTAGE

INPUT VOLTAGE: 84, 92, 100, 108, 115, 122, 130, 138V  
 SWITCH POSITIONS

For proper output voltage: set input voltage selection switch to position that most closely matches local voltage -- adjust switch until desired output voltage is displayed on meter



PLUG STYLE




TYPE /11 RECEPTACLE



TYPE /12 RECEPTACLE

IN STOCK

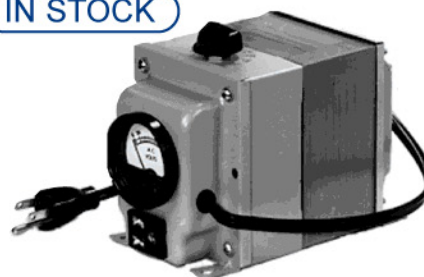

Type /11

TYPICAL APPLICATIONS: regulate unstable or fluctuating line voltage

## MULTI-TAPPED VOLTAGE REGULATORS INPUT RANGE OF 170V - 275V WITH 8 SWITCH POSITIONS

### CONTROL OUTPUT WITH METER AND SWITCH

CATALOG NUMBER	MAX.VA (WATTS)	OUTPUT VOLTAGE	WEIGHT LBS.	DIMENSIONS		
				H	W	D
MVR 17/21	150	115	5.9	4 5/8	3 7/8	5 1/2
MVR 18/21	350	115	7.9	4 5/8	3 7/8	5 3/4
MVR 11/21	500	115	11.2	4 5/8	3 7/8	6 5/8
MVR 19/21	750	115	15.5	4 5/8	3 7/8	7 1/4
MVR 13/21	1000	115	19	6	4 3/8	7 1/4
MVR 14/21	1500	115	25	6	4 3/8	8 3/8
MVR 20/21	2000	115	33.5	6	4 3/8	9 3/4
MVR 17/22	150	230	4.7	4 5/8	3 7/8	4 7/8
MVR 18/22	350	230	6.5	4 5/8	3 7/8	5 1/4
MVR 11/22	500	230	8.2	4 5/8	3 7/8	5 7/8
MVR 19/22	750	230	10	4 5/8	3 7/8	6 3/8
MVR 13/22	1000	230	13.7	4 5/8	3 7/8	7
MVR 14/22	1500	230	15.5	6	4 3/8	6 3/4
MVR 20/22	2000	230	20.5	6	4 3/8	7 3/8

- STYLE G: 6 FOOT 3 WIRE POWER CORD WITH U.S. 220V TANDEM GROUNDING PLUG
- STYLE SC: 6 FOOT 3 WIRE POWER CORD WITH EUROPEAN "SCHUKO" GROUNDING PLUG
- BUILT-IN U.S. 3 WIRE GROUNDING RECEPTACLE
- SWITCH CONTROLS INPUT VOLTAGE SELECTION
- METER DISPLAYS OUTPUT VOLTAGE

INPUT VOLTAGE: 170, 185, 200, 215, 230, 245, 260, 275V  
 SWITCH POSITIONS

For proper output voltage: set input voltage selection switch to position that most closely matches local voltage -- adjust switch until desired output voltage is displayed on meter



G PLUG



SC PLUG




TYPE /21 RECEPTACLE



TYPE /22 RECEPTACLE

IN STOCK

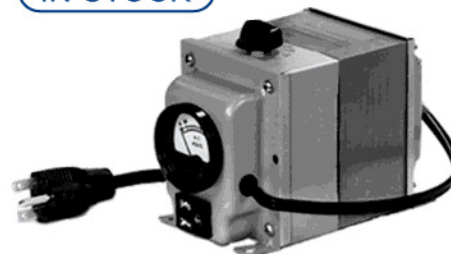

Model shown with G plug and Type /21 receptacle

TYPICAL APPLICATIONS: regulate unstable or fluctuating line voltage

NOTE: WHEN USING A TRANSFORMER WITH MORE THAN ONE APPLIANCE AT A TIME, THE TOTAL WATTAGE OF ALL APPLIANCES USED TOGETHER SHOULD NOT EXCEED THE MAX.VA (WATTS) OF THAT TRANSFORMER.

QUALITY ENGINEERED

**TODD SYSTEMS**

INC.

PRECISION BUILT

FAX: (914) 963-3506

50 ASH STREET, YONKERS, NY, 10701 U.S.A.  
 www.toddsystems.com

(914) 963-3400