



HEAVY DUTY STEPDOWN AUTOTRANSFORMERS

FULLY RATED FOR CONTINUOUS USE

DESIGNED AND MADE IN THE USA

OVER 40 YEARS AS THE INDUSTRY LEADER

- U.L. LISTED COMPONENTS
- FULLY RATED AT 50 OR 60 Hz

- CLEARLY MARKED ELECTRICAL RATINGS
- BLUE BAKED ENAMEL FINISH

UNGROUND
STEPDOWNS

220 - 240 V INPUT → 110 - 120 V OUTPUT

2 WIRE STEPDOWN 100 → 1500 VA

CATALOG NUMBER	MAX.VA (WATTS)	NOMINAL AMPS	WEIGHT LBS.	DIMENSIONS		
				H	W	D
SD-16A	100	0.9	2 1/2	3 1/8	2 5/8	3 1/4
SD-17A	150	1.3	3 1/4	3 1/8	2 5/8	3 5/8
SD-38A	200	1.7	4	3 1/8	2 5/8	4
SD-12A	250	2.2	4 1/2	3 1/8	2 5/8	4 1/2
SD-43A	300	2.6	4 5/8	3 1/8	2 5/8	4 1/2
SD-18A	350	3.0	6 1/2	4 5/8	3 7/8	3 5/8
SD-11A	500	4.4	9 3/4	4 5/8	3 7/8	4 1/4
SD-19A	750	6.5	12	4 5/8	3 7/8	5
SD-13A	1000	8.7	13 3/4	4 5/8	3 7/8	5 1/4
SD-14A	1500	13.0	19	4 5/8	3 7/8	6 5/8

IN STOCK



TYPICAL APPLICATIONS: use on double insulated appliances and those that have no ground pin, e.g: electric tools, blenders, toasters, vacuum cleaners, food processors, etc.

- 6 FOOT POWER CORD WITH U.S. 2 PRONG PLUG
- BUILT-IN 2 PRONG U.S. RECEPTACLE

GROUNDING
STEPDOWNS

220 - 240 V INPUT → 110 - 120 V OUTPUT

GROUNDING STEPDOWN 100 → 2500 VA

CATALOG NUMBER	MAX.VA (WATTS)	NOMINAL AMPS	WEIGHT LBS.	DIMENSIONS		
				H	W	D
SD-16G	100	0.9	2 1/2	3 1/8	2 5/8	3 3/8
SD-17G	150	1.3	3 1/4	3 1/8	2 5/8	3 3/4
SD-38G	200	1.7	3 3/4	3 1/8	2 5/8	4 3/16
SD-12G	250	2.2	4 1/2	3 1/8	2 5/8	4 9/16
SD-43G	300	2.6	4 1/2	3 1/8	2 5/8	4 5/8
SD-18G	350	3.0	6 3/4	4 5/8	3 7/8	4 1/8
SD-11G	500	4.4	8 3/4	4 5/8	3 7/8	4 3/4
SD-19G	750	6.5	12 3/8	4 5/8	3 7/8	5 5/8
SD-13G	1000	8.7	13 3/4	4 5/8	3 7/8	6
SD-14G	1500	13.0	18 1/8	4 5/8	3 7/8	7 1/16
SD-20G	2000	17.4	24 1/4	5 15/16	4 3/8	6 7/16
SD-39G	2500	21.7	36	6 3/8	5 5/16	7 5/8

IN STOCK



TYPICAL APPLICATIONS: use on appliances or electric tools that have 3 prong grounding plugs, e.g: office machines, electric drills, computer printers, household appliances, medical equipment, etc.

- 6 FOOT POWER CORD WITH U.S. 3 PRONG PLUG
- BUILT-IN U.S. 3 WIRE GROUNDING RECEPTACLE


EUROPEAN PLUG
GROUNDING STEPDOWNS

220 - 240 V INPUT → 110 - 120 V OUTPUT

GROUNDING STEPDOWN 100 → 2500 VA

CATALOG NUMBER	MAX.VA (WATTS)	NOMINAL AMPS	WEIGHT LBS.	DIMENSIONS		
				H	W	D
SD-16 SC	100	0.9	2 1/2	3 1/8	2 5/8	3 3/8
SD-17 SC	150	1.3	3 1/4	3 1/8	2 5/8	3 3/4
SD-38 SC	200	1.7	3 3/4	3 1/8	2 5/8	4 3/16
SD-12 SC	250	2.2	4 1/2	3 1/8	2 5/8	4 9/16
SD-43 SC	300	2.6	4 1/2	3 1/8	2 5/8	4 5/8
SD-18 SC	350	3.0	6 3/4	4 5/8	3 7/8	4 1/8
SD-11 SC	500	4.4	8 3/4	4 5/8	3 7/8	4 3/4
SD-19 SC	750	6.5	12 3/8	4 5/8	3 7/8	5 5/8
SD-13 SC	1000	8.7	13 3/4	4 5/8	3 7/8	6
SD-14 SC	1500	13.0	18 1/8	4 5/8	3 7/8	7 1/16
SD-20 SC	2000	17.4	24 1/4	5 15/16	4 3/8	6 7/16
SD-39 SC	2500	21.7	36	6 3/8	5 5/16	7 5/8

IN STOCK

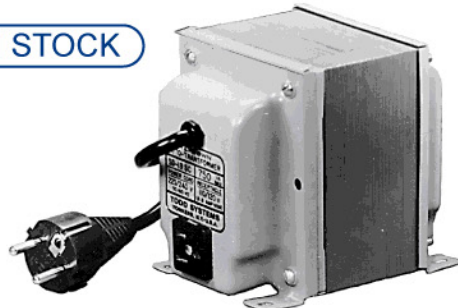

TYPICAL APPLICATIONS: same as GROUNDING STEPDOWNS, above, but has a European "Schuko" plug

- 6 FOOT POWER CORD WITH EUROPEAN "SCHUKO" PLUG
- BUILT-IN U.S. 3 WIRE GROUNDING RECEPTACLE

NOTE: WHEN USING A TRANSFORMER WITH MORE THAN ONE APPLIANCE AT A TIME, THE TOTAL WATTAGE OF ALL APPLIANCES USED TOGETHER SHOULD NOT EXCEED THE MAX.VA (WATTS) OF THAT TRANSFORMER.

QUALITY ENGINEERED

TODD SYSTEMS

INC.

PRECISION BUILT

FAX: (914) 963-3506

50 ASH STREET, YONKERS, NY, 10701 U.S.A.

www.toddsystems.com

(914) 963-3400