



3 TAP AUTOTRANSFORMERS FOR REFRIGERATION AND FRACT. HP MOTOR USE

DESIGNED AND MADE IN THE USA

OVER 40 YEARS AS THE INDUSTRY LEADER

- U.L. LISTED COMPONENTS
- FULLY RATED AT 50 OR 60 Hz

- CLEARLY MARKED ELECTRICAL RATINGS
- BLUE BAKED ENAMEL FINISH

Safely use 60Hz Fractional Horsepower Motors on 50Hz Power

**AMERICAN STYLE
GROUNDING PLUG**

188 - 212
213 - 233
234 - 255


VOLTS INPUT → 105 VOLTS OUTPUT

350 → 2000 VA 3 TAP

CATALOG NUMBER	MAX.VA (WATTS)	NOMINAL AMPS	WEIGHT (LBS.)	DIMENSIONS		
				H	W	D
SD-31G	350	3.33	7.7	4 5/8	3 7/8	4 7/8
SD-32G	550	5.24	10.5	4 5/8	3 7/8	5 3/8
SD-33G	750	7.14	12.7	4 5/8	3 7/8	6
SD-42G	850	8.10	14.7	4 5/8	3 7/8	6 3/8
SD-34G	1000	9.52	17	4 5/8	3 7/8	7
SD-40G	1500	14.29	24.5	5 1/2	4 1/2	7 7/8
SD-44G	2000	19.05	24.7	5 1/2	4 1/2	7 7/8

- 6 FOOT POWER CORD WITH U.S. 3 PRONG PLUG
- BUILT-IN U.S. 3 WIRE GROUNDING RECEPTACLE
- SWITCH FOR INPUT VOLTAGE SELECTION

IN STOCK

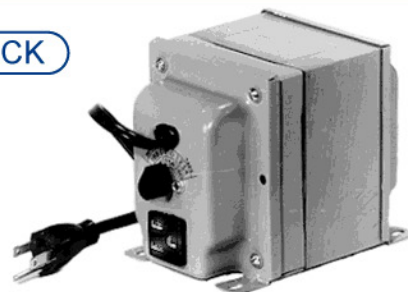

TYPICAL APPLICATIONS: air conditioners, refrigerators, washing machines, or other equipment with fractional horsepower motors

**EUROPEAN STYLE
GROUNDING PLUG**

188 - 212
213 - 233
234 - 255

VOLTS INPUT → 105 VOLTS OUTPUT

350 → 2000 VA 3 TAP

CATALOG NUMBER	MAX.VA (WATTS)	NOMINAL AMPS	WEIGHT (LBS.)	DIMENSIONS		
				H	W	D
SD-31SC	350	3.33	7.7	4 5/8	3 7/8	4 7/8
SD-32SC	550	5.24	10.5	4 5/8	3 7/8	5 3/8
SD-33SC	750	7.14	12.7	4 5/8	3 7/8	6
SD-42SC	850	8.10	14.7	4 5/8	3 7/8	6 3/8
SD-34SC	1000	9.52	17	4 5/8	3 7/8	7
SD-40SC	1500	14.29	24.5	5 1/2	4 1/2	7 7/8
SD-44SC	2000	19.05	24.7	5 1/2	4 1/2	7 7/8

- 6 FOOT POWER CORD WITH EUROPEAN "SCHUKO" PLUG
- BUILT-IN U.S. 3 WIRE GROUNDING RECEPTACLE
- SWITCH FOR INPUT VOLTAGE SELECTION

IN STOCK



TYPICAL APPLICATIONS: same as above, but has a grounding European "Schuko" round pin plug

**LEAD WIRE
TERMINALS**

188 - 212
213 - 232
234 - 255


VOLTS INPUT → 105 VOLTS OUTPUT

350 → 2000 VA 3 TAP

CATALOG NUMBER	MAX.VA (WATTS)	NOMINAL AMPS	WEIGHT (LBS.)	DIMENSIONS		
				H	W	D
SD-31L	350	3.33	7.5	4 5/8	3 7/8	3 7/8
SD-32L	550	5.24	9.9	4 5/8	3 7/8	4 3/8
SD-33L	750	7.14	12.2	4 5/8	3 7/8	5
SD-42L	850	8.10	14	4 5/8	3 7/8	5 1/2
SD-34L	1000	9.52	16.2	4 5/8	3 7/8	6
SD-40L	1500	14.29	24	5 1/2	4 1/2	6 7/8
SD-44L	2000	19.05	24	5 1/2	4 1/2	6 7/8

- 12 INCH LEAD WIRES FOR PERMANENT WIRING
- JUNCTION BOX FOR INPUT VOLTAGE SELECTION

IN STOCK



TYPICAL APPLICATIONS: same as above, but has lead wires for permanent wiring / mounting

NOTE: WHEN USING A TRANSFORMER WITH MORE THAN ONE APPLIANCE AT A TIME, THE TOTAL WATTAGE OF ALL APPLIANCES USED TOGETHER SHOULD NOT EXCEED THE MAX.VA (WATTS) OF THAT TRANSFORMER.

QUALITY ENGINEERED

TODD SYSTEMS

INC.

PRECISION BUILT

FAX: (914) 963-3506

50 ASH STREET, YONKERS, NY, 10701 U.S.A.
www.toddsystems.com

(914) 963-3400