



# THERMALLY PROTECTED STEPDOWN AUTOTRANSFORMERS

DESIGNED AND MADE IN THE USA

- CARRIES CE MARK
- FULLY RATED AT 50 OR 60 Hz



OVER 40 YEARS AS THE INDUSTRY LEADER

- CLEARLY MARKED ELECTRICAL RATINGS
- BLUE BAKED ENAMEL FINISH

IEC INLET AND OUTLET

220 - 240 V INPUT → 110 - 120 V OUTPUT


GROUNDING STEPDOWN 100 → 1500 VA

CATALOG NUMBER	MAX.VA (WATTS)	NOMINAL AMPS	WEIGHT (LBS.)	DIMENSIONS		
				H	W	D
SD-16IEC/IOTC	100	0.9	2 1/4	3 1/8	2 1/2	3 5/8
SD-17IEC/IOTC	150	1.3	3 1/2	3 1/8	2 1/2	4
SD-38IEC/IOTC	200	1.7	4	3 1/8	2 1/2	4 7/16
SD-12IEC/IOTC	250	2.2	4 1/2	3 1/8	2 1/2	4 13/16
SD-43IEC/IOTC	300	2.6	5	3 1/8	2 1/2	4 7/8
SD-18IEC/IOTC	350	3.0	7	4 1/2	3 3/4	4 5/8
SD-11IEC/IOTC	500	4.3	9	4 1/2	3 3/4	5 1/4
SD-19IEC/IOTC	750	6.5	12 1/2	4 1/2	3 3/4	6 1/8
SD-13IEC/IOTC	1000	8.7	14 1/2	4 1/2	3 3/4	6 1/2
SD-14IEC/IOTC	1500	13.0	19	4 1/2	3 3/4	7 9/16

- THERMAL PROTECTION PREVENTS DAMAGE DUE TO OVERLOAD
- JUMPER CABLE (NOT INCLUDED) IS USED TO CONNECT YOUR EQUIPMENT'S NEMA 5-15 PLUG TO THE TRANSFORMER IEC OUTLET



IN STOCK



AVAILABLE NEMA 5-15 : IEC JUMPER CABLE

TYPICAL APPLICATIONS: 115V equipment to be sold in Europe or anywhere CE approval is needed

EUROPEAN CORD & PLUG / IEC OUTLET

220 - 240 V INPUT → 110 - 120 V OUTPUT


GROUNDING STEPDOWN 100 → 1500 VA

CATALOG NUMBER	MAX.VA (WATTS)	NOMINAL AMPS	WEIGHT (LBS.)	DIMENSIONS		
				H	W	D
SD-16SC/IECTC	100	0.9	2 1/4	3 1/8	2 1/2	3 5/8
SD-17SC/IECTC	150	1.3	3 1/2	3 1/8	2 1/2	4
SD-38SC/IECTC	200	1.7	4	3 1/8	2 1/2	4 7/16
SD-12SC/IECTC	250	2.2	4 1/2	3 1/8	2 1/2	4 13/16
SD-43SC/IECTC	300	2.6	5	3 1/8	2 1/2	4 7/8
SD-18SC/IECTC	350	3.0	7	4 1/2	3 3/4	4 5/8
SD-11SC/IECTC	500	4.3	9	4 1/2	3 3/4	5 1/4
SD-19SC/IECTC	750	6.5	12 1/2	4 1/2	3 3/4	6 1/8
SD-13SC/IECTC	1000	8.7	14 1/2	4 1/2	3 3/4	6 1/2
SD-14SC/IECTC	1500	13.0	19	4 1/2	3 3/4	7 9/16

- NOTE: CENTRAL EUROPEAN SCHUKO PLUG SHOWN -- ANY FOREIGN PLUG IS ALSO AVAILABLE
- THERMAL PROTECTION PREVENTS DAMAGE DUE TO OVERLOAD
- JUMPER CABLE (NOT INCLUDED) IS USED TO CONNECT YOUR EQUIPMENT'S NEMA 5-15 PLUG TO THE TRANSFORMER IEC OUTLET



IN STOCK

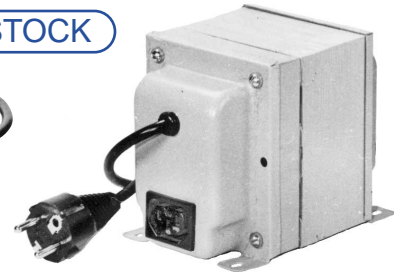

AVAILABLE NEMA 5-15 : IEC JUMPER CABLE

TYPICAL APPLICATIONS: 115V equipment to be sold in Europe or anywhere CE approval is needed

FLYING LEADS FOR PERMANENT WIRING

220 - 240 V INPUT → 110 - 120 V OUTPUT


GROUNDING STEPDOWN 100 → 1500 VA

CATALOG NUMBER	MAX.VA (WATTS)	NOMINAL AMPS	WEIGHT (LBS.)	DIMENSIONS		
				H	W	D
SD-16LTC	100	0.9	2 1/4	3 1/8	2 1/2	2 5/8
SD-17LTC	150	1.3	3 1/2	3 1/8	2 1/2	3
SD-38LTC	200	1.7	4	3 1/8	2 1/2	3 7/16
SD-12LTC	250	2.2	4 1/2	3 1/8	2 1/2	3 13/16
SD-43LTC	300	2.6	5	3 1/8	2 1/2	3 7/8
SD-18LTC	350	3.0	7	4 1/2	3 3/4	3 5/8
SD-11LTC	500	4.3	9	4 1/2	3 3/4	4 1/4
SD-19LTC	750	6.5	12 1/2	4 1/2	3 3/4	5 1/8
SD-13LTC	1000	8.7	14 1/2	4 1/2	3 3/4	5 1/2
SD-14LTC	1500	13.0	19	4 1/2	3 3/4	6 9/16

- 12" FLYING LEADS FOR PERMANENT WIRING
- THERMAL PROTECTION PREVENTS DAMAGE DUE TO OVERLOAD



IN STOCK



TYPICAL APPLICATIONS: 115V equipment to be sold in Europe or anywhere CE approval is needed

QUALITY ENGINEERED

**TODD SYSTEMS** INC.

PRECISION BUILT

FAX: (914) 963-3506

50 ASH STREET, YONKERS, NY, 10701 U.S.A.  
www.toddsystems.com

(914) 963-3400