



# ADJUSTABLE LINE ISOLATION TRANSFORMERS

FULLY RATED FOR CONTINUOUS USE

DESIGNED AND MADE IN THE USA

OVER 40 YEARS AS THE INDUSTRY LEADER

- U.L. LISTED COMPONENTS
- FULLY RATED AT 50 OR 60 Hz

- CLEARLY MARKED ELECTRICAL RATINGS
- BLUE BAKED ENAMEL FINISH


AMERICAN STYLE  
GROUNDING PLUG

105/115/125 VOLTS INPUT → 115 VOLTS OUTPUT

50 → 1000 VA ISOLATION  
ELECTROSTATIC SHIELD CONNECTED TO CORE

CATALOG NUMBER	MAX.VA (WATTS)	NOMINAL AMPS	HIPOT TEST VOLTS	WEIGHT LBS.	DIMENSIONS				
					H	W	D	MW	MD
LI-50-2G	50	0.44	1500	3	3 1/2	2 7/8	3 7/8	2 1/4	2 1/2
LI-100-2G	100	0.87	1500	4 1/2	3 1/2	2 7/8	4 3/8	2 1/4	3
LI-250-2G	250	2.17	1500	11 1/2	4 5/8	3 7/8	5 1/8	3	4
LI-500-2G	500	4.35	1500	19	6	4 3/8	5 7/8	3 7/16	4 1/8
LI-1000-2G	1000	8.70	1500	34	6	4 3/8	8 1/8	3 7/16	6 3/8

IN STOCK

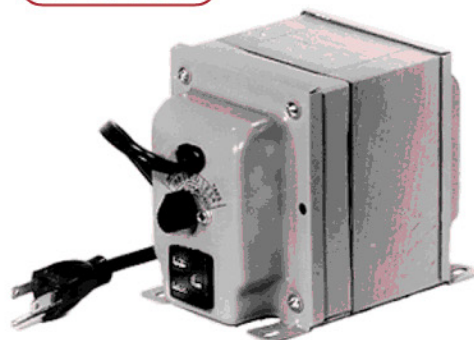

- 6 FOOT 3 WIRE U.S. GROUNDING POWER CORD
- BUILT-IN U.S. 3 WIRE GROUNDING RECEPTACLE
- SWITCH FOR INPUT VOLTAGE SELECTION

Provides isolation of power line from ground and is effective in removing hash and line noise for sensitive equipment, e.g. lab instruments, audio equipment, etc.


LEAD WIRES FOR  
PERMANENT WIRING

105/115/125 VOLTS INPUT → 115 VOLTS OUTPUT

50 → 1000 VA ISOLATION  
ELECTROSTATIC SHIELD CONNECTED TO CORE

CATALOG NUMBER	MAX.VA (WATTS)	NOMINAL AMPS	HIPOT TEST VOLTS	WEIGHT LBS.	DIMENSIONS				
					H	W	D	MW	MD
LI-50-2L	50	0.44	1500	3	3 1/2	2 7/8	3 7/8	2 1/4	2 1/2
LI-100-2L	100	0.87	1500	4 1/2	3 1/2	2 7/8	4 3/8	2 1/4	3
LI-250-2L	250	2.17	1500	11 1/2	4 5/8	3 7/8	5 1/8	3	4
LI-500-2L	500	4.35	1500	19	6	4 3/8	5 7/8	3 7/16	4 1/8
LI-1000-2L	1000	8.70	1500	34	6	4 3/8	8 1/8	3 7/16	6 3/8

IN STOCK

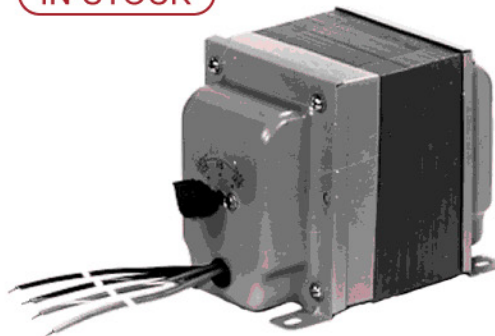

- FOUR 12 INCH LEAD WIRES USED FOR PERMANENT WIRING
- SWITCH FOR INPUT VOLTAGE SELECTION

Provides isolation of power line from ground and is effective in removing hash and line noise for sensitive equipment, e.g. lab instruments, audio equipment, etc.

NOTE: WHEN USING A TRANSFORMER WITH MORE THAN ONE APPLIANCE AT A TIME, THE TOTAL WATTAGE OF ALL APPLIANCES USED TOGETHER SHOULD NOT EXCEED THE MAX.VA (WATTS) OF THAT TRANSFORMER.

QUALITY ENGINEERED

**TODD SYSTEMS**

INC.

PRECISION BUILT

FAX: (914) 963-3506

50 ASH STREET, YONKERS, NY, 10701 U.S.A.  
www.toddsystems.com

(914) 963-3400