



TEMPGUARD AUTOTRANSFORMERS

THERMALLY PROTECTED — NO FUSES EVER NEEDED

DESIGNED AND MADE IN THE USA

OVER 40 YEARS AS THE INDUSTRY LEADER

- ALL COMPONENTS U.L. LISTED
- FULLY RATED AT 50 OR 60 Hz

- CLEARLY MARKED ELECTRICAL RATINGS
- BLUE BAKED ENAMEL FINISH

AVOID TRANSFORMER DAMAGE DUE TO ACCIDENTAL OR TEMPORARY OVERLOAD

Compare a **TEMPGUARD** by **TODD SYSTEMS** to any standard transformer:

TEMPGUARD by TODD SYSTEMS

- THE ULTIMATE IN OVERLOAD PROTECTION — **TEMPGUARD TURNS ITSELF OFF BEFORE ANY DAMAGE IS DONE TO THE TRANSFORMER FROM OVERLOADING AND SUBSEQUENT OVERHEATING**
- AFTER **TEMPGUARD** COOLS DOWN (10-20min), **TEMPGUARD** TURNS ON AGAIN — **AUTOMATICALLY**
- IF **TEMPGUARD** EVER TURNS ITSELF OFF, IT IS AN INDICATION THAT THE APPLIANCE(S) EXCEEDS **TEMPGUARD'S VA (WATTAGE) RATING** — **TEMPGUARD** WILL CONTINUE TO TURN OFF AND ON WHEN USED WITH THIS APPLIANCE(S) — **WITH NO DAMAGE DONE**

ANY STANDARD TRANSFORMER

- IF AN APPLIANCE EXCEEDS ANY STANDARD TRANSFORMER'S VA (WATTAGE) RATING, THE TRANSFORMER WILL HEAT UP AND EVENTUALLY BURN OUT... **GOOD BYE TRANSFORMER**


EUROPEAN STYLE GROUNDING PLUG

THERMALLY PROTECTED WITHOUT FUSES

STEPDOWN 220-240V TO 110-120V

CATALOG NUMBER	MAX.VA (WATTS)	NOMINAL AMPS	WEIGHT LBS.	DIMENSIONS		
				H	W	D
SD-16 SCTC	100	0.9	2 1/2	3 1/8	2 5/8	3 3/8
SD-17 SCTC	150	1.3	3 1/4	3 1/8	2 5/8	3 3/4
SD-38 SCTC	200	1.7	3 3/4	3 1/8	2 5/8	4 3/16
SD-12 SCTC	250	2.2	4 1/2	3 1/8	2 5/8	4 9/16
SD-43 SCTC	300	2.6	4 1/2	3 1/8	2 5/8	4 5/8
SD-18 SCTC	350	3.0	6 3/4	4 5/8	3 7/8	4 1/8
SD-11 SCTC	500	4.4	8 3/4	4 5/8	3 7/8	4 3/4
SD-19 SCTC	750	6.5	12 3/8	4 5/8	3 7/8	5 5/8
SD-13 SCTC	1000	8.7	13 3/4	4 5/8	3 7/8	6
SD-14 SCTC	1500	13.0	18 1/8	4 5/8	3 7/8	7 1/16
SD-20 SCTC	2000	17.4	24 1/4	5 15/16	4 3/8	6 7/16
SD-39 SCTC	2500	21.7	36	6 3/8	5 5/16	7 5/8

NEW !!!
Central European "Schuko" Plug fits into most European outlets

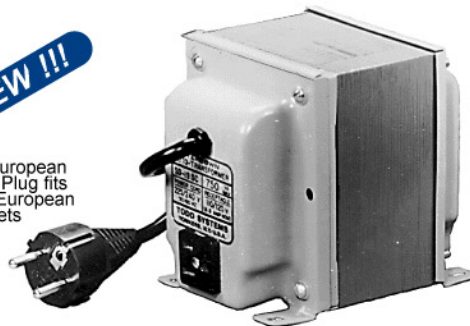

- 6 FOOT POWER CORD WITH EUROPEAN "SCHUKO" PLUG
- BUILT-IN U.S. 3 WIRE GROUNDING RECEPTACLE

- THERMAL PROTECTION PREVENTS OVERLOAD DAMAGE — WITH NO FUSES NEEDED:
- TRANSFORMER TURNS OFF IF OVERHEATED FROM OVERLOAD — RESETS ITSELF WHEN COOLED


AMERICAN STYLE GROUNDING PLUG

THERMALLY PROTECTED WITHOUT FUSES

STEPDOWN 220-240V TO 110-120V

CATALOG NUMBER	MAX.VA (WATTS)	NOMINAL AMPS	WEIGHT LBS.	DIMENSIONS		
				H	W	D
SD-16 GTC	100	0.9	2 1/2	3 1/8	2 5/8	3 3/8
SD-17 GTC	150	1.3	3 1/4	3 1/8	2 5/8	3 3/4
SD-38 GTC	200	1.7	3 3/4	3 1/8	2 5/8	4 3/16
SD-12 GTC	250	2.2	4 1/2	3 1/8	2 5/8	4 9/16
SD-43 GTC	300	2.6	4 1/2	3 1/8	2 5/8	4 5/8
SD-18 GTC	350	3.0	6 3/4	4 5/8	3 7/8	4 1/8
SD-11 GTC	500	4.4	8 3/4	4 5/8	3 7/8	4 3/4
SD-19 GTC	750	6.5	12 3/8	4 5/8	3 7/8	5 5/8
SD-13 GTC	1000	8.7	13 3/4	4 5/8	3 7/8	6
SD-14 GTC	1500	13.0	18 1/8	4 5/8	3 7/8	7 1/16
SD-20 GTC	2000	17.4	24 1/4	5 15/16	4 3/8	6 7/16
SD-39 GTC	2500	21.7	36	6 3/8	5 5/16	7 5/8

NEW !!!
American plug is easily used with foreign plug adapters

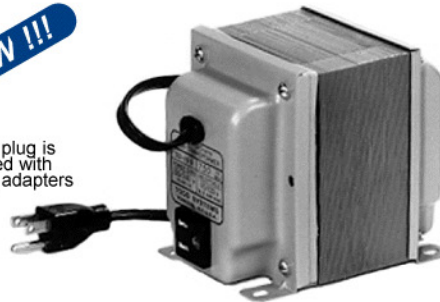

- 6 FOOT POWER CORD WITH U.S. 3 PRONG PLUG
- BUILT-IN U.S. 3 WIRE GROUNDING RECEPTACLE

- THERMAL PROTECTION PREVENTS OVERLOAD DAMAGE — WITH NO FUSES NEEDED:
- TRANSFORMER TURNS OFF IF OVERHEATED FROM OVERLOAD — RESETS ITSELF WHEN COOLED

QUALITY ENGINEERED

TODD SYSTEMS INC.

PRECISION BUILT

FAX: (914) 963-3506

50 ASH STREET, YONKERS, NY, 10701 U.S.A.
www.toddsystems.com

(914) 963-3400